



Location Pompe ATLAS COPCO PAS100 MF250 DIESEL INSONORISE "Système à Amorçage à Sec"

Gamme "PAS" DIESEL Insonorisée Pompe Centrifuge Amorçage à "Sec" (pompe à vide 50 m³/h)
Fonctionnement à sec possible Débit Maxi : 250 m³/h DN Aspiration / refoulement : Ø 100 mm (Raccords BAUER)



Marque : ATLAS COPCO

Référence : PAS100MF250

Critères associés :

ENVIRONNEMENT : ASSAINISSEMENT, CHANTIER BTP

Type de FLUIDE : Eaux claires, Eaux usées, Eaux chargées

Type de LIQUIDE : Liquides abrasifs, Liquides corrosifs

ENERGIE : Thermique

PRESSION BAR : 2,5 Bar

DEBIT M3/H : 250 m³/h

PAS100MF250 ATLAS COPCO

PAS 100MF 250

Dry prime pumps




SEPI
Location - Vente de


Features :

- Hinge kit for pump maintenance.
- High capacity diaphragm pump.
- Mechanical seal oil bath.
- PW 250 controller.
- Stackable.

Performance Curves accor. to UNI 9906

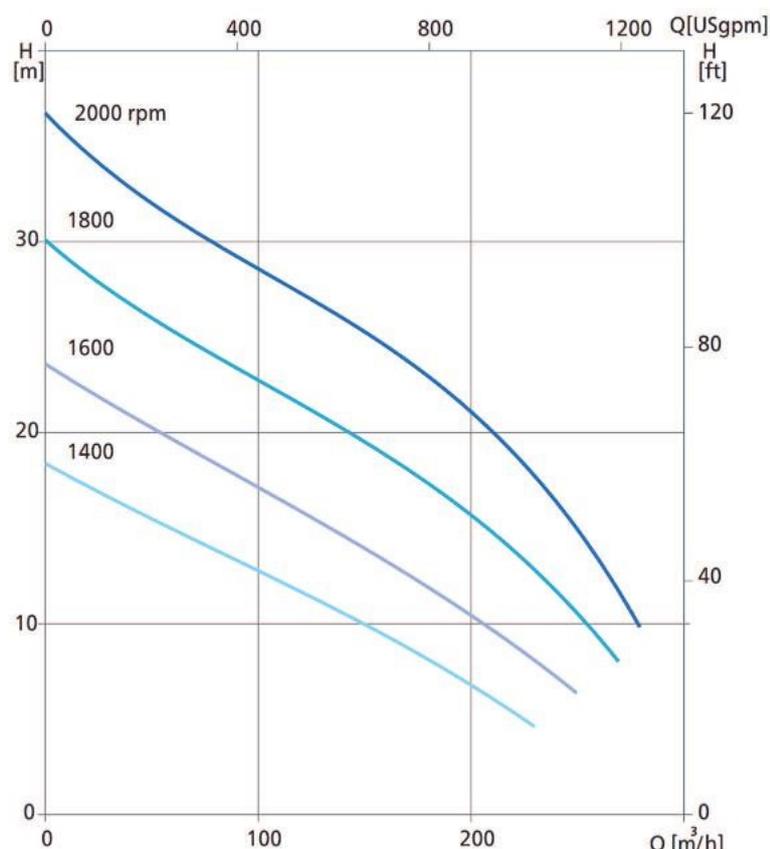

Atlas Copco

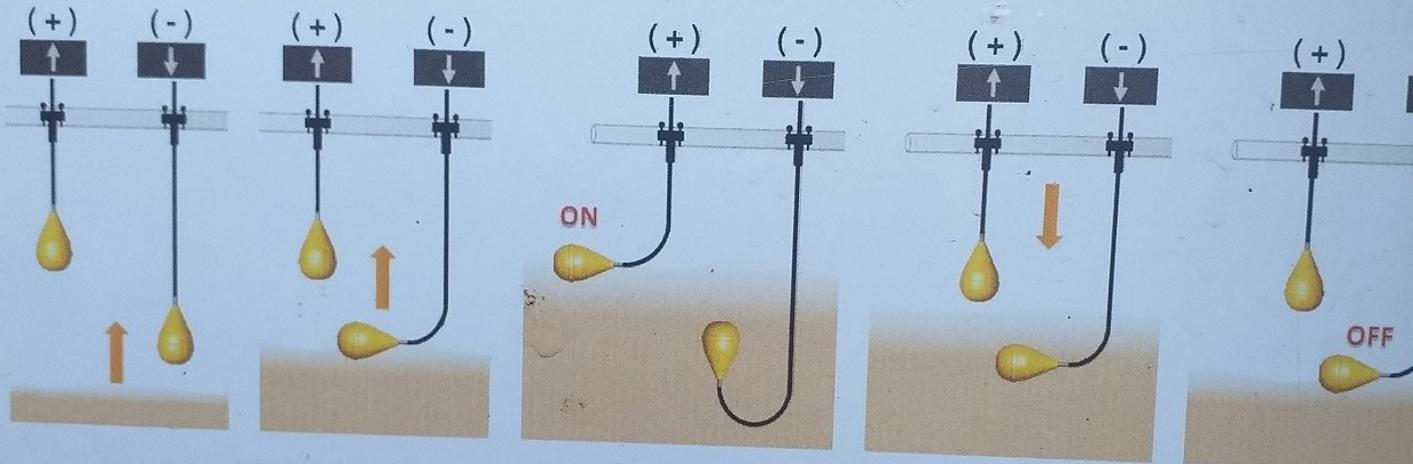

3081 6002 99


www.atlascopco.




Technical information



Dimensions	
Width	1100 mm
Length	2250 mm
Height	1550 mm
Max dry weight	1300 kg (2867 lbs)



Dimensions	
Width	950 mm
Length	1750 mm
Height	1520 mm
Max dry weight	880 kg (1940 lbs)



Dimensions	
Width	1410 mm
Length	3120 mm
Height	1880 mm
Max dry weight	1020 kg (2249 lbs)

Specifications				
Pump size	100	mm	4"	in
Max flow	250	m ³ /h	1100	USgpm
Max head	36	m	118	ft
Solid handlings	50	mm	2"	in
Operating speed range	1400 – 2000			rpm
Rated power	23	kW	31	HP
Fuel tank size	300	l	79	USg
Fuel consumption	5,8	l/h	1,5	USgph
Max running hours	52			h

Engine	
Cooling	Water
Make	Kohler
Model	KDI 1903M

Engine	
Cooling	Air
Make	Deutz
Model	D2011L03I

[Lien vers la fiche du produit](#)