



Location Pompe ATLAS COPCO PAS150 MF250 DIESEL INSONORISE "Système à Amorçage à Sec"

Gamme "PAS" DIESEL Insonorisée Pompe Centrifuge Amorçage à "Sec" (pompe à vide 50 m³/h)
Fonctionnement à sec possible Débit Maxi : 540 m³/h DN Aspiration / refoulement : Ø 150 mm (Raccords BAUER)



Marque : ATLAS COPCO

Référence : PAS150MF250

Critères associés :

ENVIRONNEMENT : ASSAINISSEMENT, CHANTIER BTP

Type de FLUIDE : Eaux claires, Eaux usées, Eaux chargées

Type de LIQUIDE : Liquides abrasifs, Liquides corrosifs

ENERGIE : Thermique

PRESSION BAR : 3,5 Bar

DEBIT M3/H : 550 m³/h

PAS100MF250 ATLAS COPCO

PAS 150MF 250

Dry prime pumps




SEPI
Location - Vente de

Features :

- Hinge kit for pump maintenance.
- High capacity diaphragm pump.
- Mechanical seal oil bath.
- PW 250 controller.
- Stackable.

Performance Curves accor. to UNI 9906

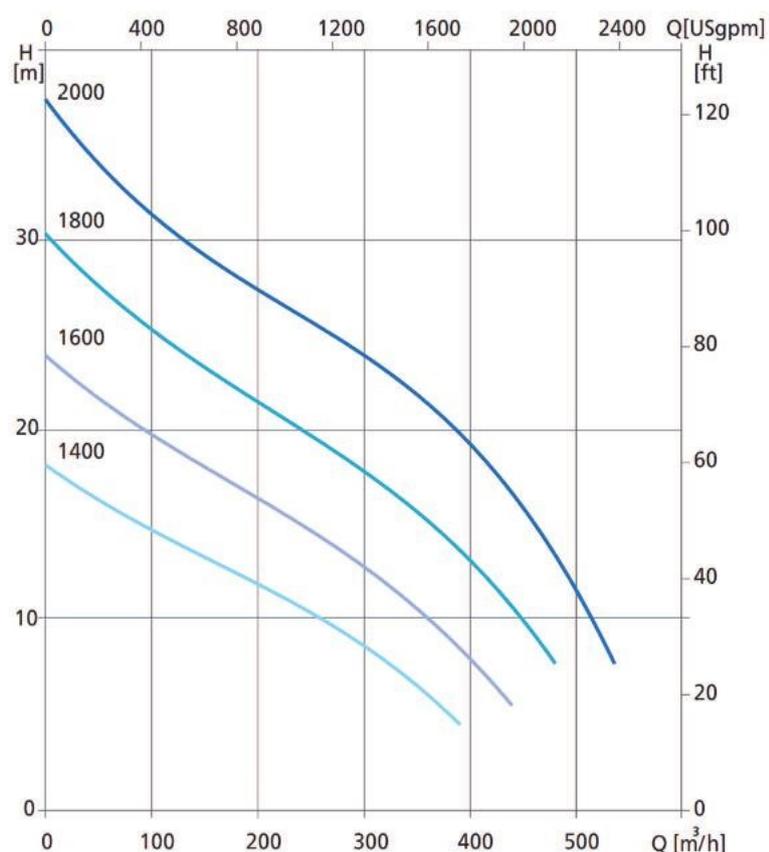





Technical information



Dimensions	
Width	1100 mm
Length	2250 mm
Height	1550 mm
Max dry weight	1350kg (2977 lbs)



Dimensions	
Width	950 mm
Length	1750 mm
Height	1520 mm
Max dry weight	925 kg (2039 lbs)



Dimensions	
Width	1410 mm
Length	3120 mm
Height	1880 mm
Max dry weight	1050 kg (2315 lbs)

Specifications				
Pump size	150	mm	6"	in
Max flow	540	m ³ /h	2380	USgpm
Max head	37	m	121	ft
Solid handlings	76	mm	3"	in
Operating speed range	1400 – 2000			rpm
Rated power	22	kW	29	HP
Fuel tank size	300	l	79	USg
Fuel consumption	5,4	l/h	1,4	USgph
Max running hours	56			h

Engine	
Cooling	Water
Make	Kohler
Model	KDI 2504M

Engine	
Cooling	Air
Make	Deutz
Model	D2011L03I

[Lien vers la fiche du produit](#)